

## RU-3 blue DET

### COMPOSITION


Material	Thermoplastic polyurethane (TPU)
Hardness	85 ±5 Sh.A
Colour	Dark blue
Surface	Smooth
Coefficient of friction on steel	0.4

### TECHNICAL SPECIFICATIONS

Diameter	3.0 mm	0.12 in.
Weight	8.5 gr/m	0.01 lbs./ft.
Minimum pulley diameter	20.0 mm	0.79 in.
Pull for 8% elongation	18.0 N	4.0 lbf.
Temperature resistance (1)	min. -20 °C max 60 °C	-4 °F 140 °F
(1) Use of the belt with limit values may reduce its life		
Humidity influence	no	
Permanent antistatic dynamically UNI EN ISO 21179	no	

### JOINTING SYSTEM

Being thermoweldable polyurethane it enables quick endless jointing of belts. For high precision joints of round belts of any size CHIORINO supply the **FAST JOINT welder "S15"**.

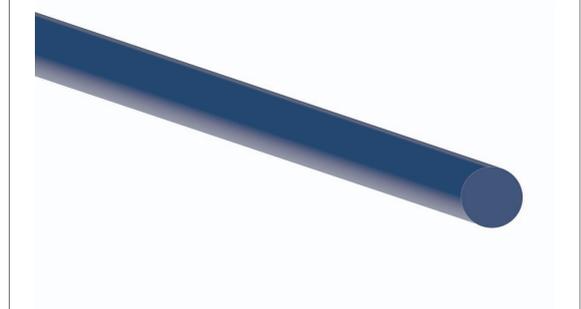


### FEATURES

- Excellent resistance to hidrolisis
- Extremely good tensile strengths
- Elasticity
- Flexibility values

### COMPLIANCES

REACH EC 1907/2006 Regulation and Amendments  
 EC 1935/2004 Regulation and Amendments  
 EC 2023/2006 Regulation and Amendments  
 EU 10/2011, 2023/1442 Regulation and Amendments  
 HACCP (Hazard Analysis and Critical Control Points)  
 FDA (Food and Drug Administration)



### SUITABLE FOR

Packaging  
 Food: slicing machines  
 Food: bakery

### NOTES

Belts which are used in various markets for transmission of light duty drives, at medium low speeds and conveying light loads.

PRODUCT CODE ES873

Last Update: 10-07-2023

### DISCLAIMER

The information contained in this document describes the features of the CHIORINO product as tested in a laboratory environment at a temperature of +23 degrees °C at 50% relative humidity. It does not necessarily reflect the conditions of industrial use and it does not guarantee the product to be suitable for certain applications. The client remains liable for the proper selection and correct use of the CHIORINO product. CHIORINO cannot be held responsible should damages arise from the use of its products. Necessary alterations to this data can be made without prior notice.