

2T12 U0-U-G10 HS FH

COMPOSITION


Conveying surface	Material	Synthetic elastomer	
	Thickness	1.00 mm	0.039 in.
	Surface pattern	FH	
	Colour	Green	
	Coefficient of friction	HF	
Textile carcass	Material	Polyester (PET)	
	Plies no.	2	
	Weft type	Flexible	
Driving surface	Material	Fabric with polyurethane (TPU) impregnation	
	Thickness	--- mm	--- in.
	Surface pattern	Fabric	
	Colour	Grey	

TECHNICAL SPECIFICATIONS

Total thickness		2.20 mm	0.09 in.
Weight		2.20 kg/m ²	0.45 lbs./sq.ft
Elongation at 1%		12.0 N/mm	69.0 lbs./in.
Max. admissible pull		24 N/mm	137.0 lbs./in.
Temperature resistance ⁽¹⁾	min.	-20 °C	-4 °F
	max.	100 °C	212 °F
⁽¹⁾ use of the belt with limit values may reduce its life			
Minimum roller diameter ⁽²⁾			
■ Knife edge		no	
■ Bending roller		50 mm	2.0 in.
■ Counter-bending roller		60 mm	2.4 in.
⁽²⁾ The above mentioned values depend on the type of CHIORINO joint recommended			
Coefficient of friction on driving surface			
■ Raw steel sheet		0.20 [-]	
■ Laminated plastic/wood		0.25 [-]	
■ Steel roller		0.20 [-]	
■ Rubberized roller		0.30 [-]	
Max. production width		1800 mm	71 in.

SUITABLE FOR

- Corrugated cardboard
- Packaging
- Airports
- Curve belts
- Corrugated cardboard
- Steel blankets magnetic elevators
- Industrial laundries

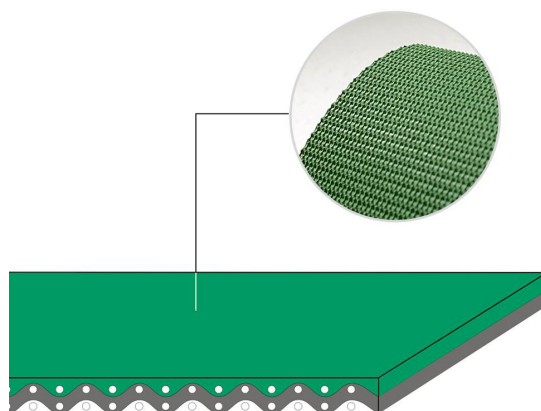

FEATURES

Humidity influence	no
Suitable to metal detector	no
Permanent antistatic dynamically (UNI EN ISO 21179)	yes
Static conductivity (UNI EN ISO 284)	no
Conveying on skid bed	yes
Conveying on rollers	yes
Conveying on skid bed on top and return	no
Troughed conveying	yes
Swan neck conveying	no
Inclined conveying	yes
Accumulators belts	no
Curved conveyor	yes
Chemical resistances link	6

COMPLIANCES

REACH EC 1907/2006 Regulation and Amendments

NOTES

PRODUCT CODE NA1135

Last Update: 01-03-2019

DISCLAIMER

The information contained in this document describes the features of the CHIORINO product as tested in a laboratory environment at a temperature of +23 degrees °C at 50% relative humidity. It does not necessarily reflect the conditions of industrial use and it does not guarantee the product to be suitable for certain applications. The client remains liable for the proper selection and correct use of the CHIORINO product. CHIORINO cannot be held responsible should damages arise from the use of its products. Necessary alterations to this data can be made without prior notice.

2T12 U0-U-G10 HS FH

• Recommended joining procedure SKIVED JOINT '4'



Check our general catalogue to get further info on CHIORINO joining methods.


• Skiving instructions

Skiver	Belt thickness mm	Length mm	Straight/ diagonal cut	Cam/ wedge number	Pulley				Top cover			
					T mm	B mm	Thickness adjustment	End stop switch of working plate	T mm	B mm	Thickness adjustment	End stop switch of working plate
B600 A	2,2	50	Diagonal	1,5-1,0	39	0	18,2	---	39	8	17.2	---
B300 SA	---	---	---	---	---	---	---	---	---	---	---	---

• Guide to the use of adhesives

Pour the **I hardener** with the **R cement** (pot-life 2 hours).
 Apply a thin layer of above mix on both splices.
 Let dry for 5 minutes, then match the belt ends, paying attention to align properly.
 Press according to the instructions shown.
 To ensure best joint life it is advisable not to run or tension the belt for 24 hours.

• Layout of components

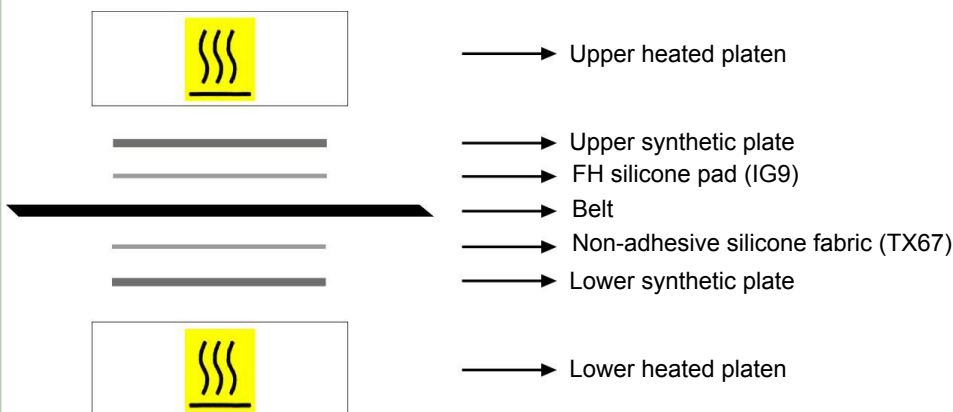

Press settings	
Upper platen temperature	110 °C
Lower platen temperature	110 °C
Curing time in press	15 min.
Driving torque	2,5
Cooling time: it is recommended to remove the belt from the press once a temperature of 60/70 degrees C is reached.	

• Notes

PRODUCT CODE NA1135

Last Update: 13-06-2022

DISCLAIMER

The information contained in this document describes the features of the CHIORINO product as tested in a laboratory environment at a temperature of +23 degrees °C at 50% relative humidity. It does not necessarily reflect the conditions of industrial use and it does not guarantee the product to be suitable for certain applications. The client remains liable for the proper selection and correct use of the CHIORINO product. CHIORINO cannot be held responsible should damages arise from the use of its products. Necessary alterations to this data can be made without prior notice.