


1M5 U3-U3 HP FL/FM W AM

Recommended joining procedure

SINGLE Z - 80 x 10 mm

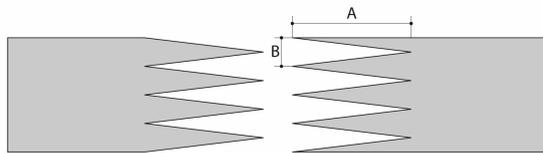

A = 80 mm
B = 10 mm

Other joining methods can be used:

MICRO Z - 30 x 6 mm


Check our general catalogue to get further info on CHIORINO joining methods.

• Pressing

Heating press P \ PL \ PLS

Press settings	
Upper platen temperature	155 °C
Lower platen temperature	155 °C
Temperature gauge setting	155 °C
Curing time in press	3 min.
Pressure	2 bar
Film	TC740 - Film PU HP W AM
Cement	---


1. Use the KM330 thermometer to check the effective temperature inside the belt. Place the thermometer gauge as shown by the drawing at side.

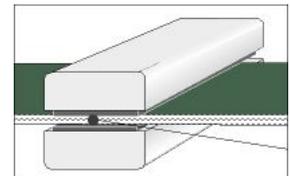

2. Allow the cooling cycle to be completed before removing the belt from the press.

3. A reliable strength of the joint is ensured, providing that temperatures reached by the press are those indicated in the table at side. A periodical inspection of the thermostats is recommended, to make sure they function correctly.

• Layout of components

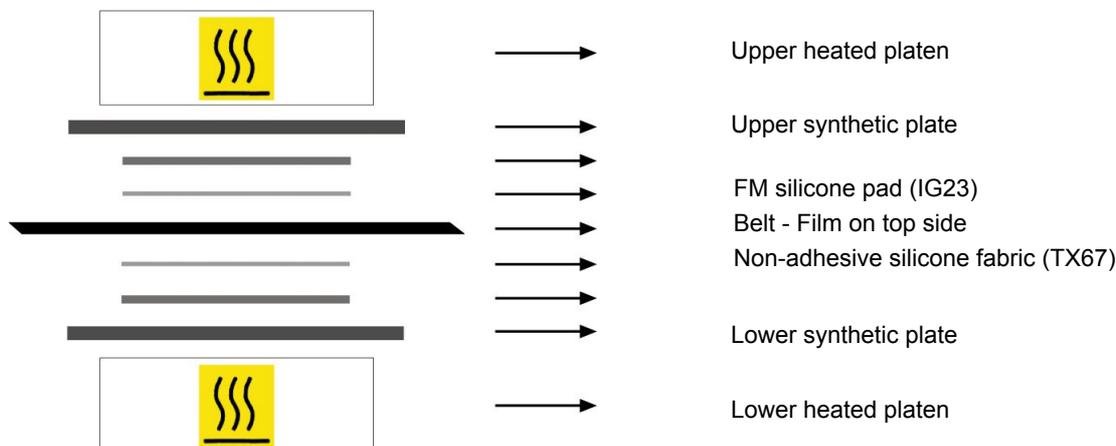

• Notes

PRODUCT CODE NA1738

Last Update: 21-04-2023

DISCLAIMER

The information contained in this document describes the features of the CHIORINO product as tested in a laboratory environment at a temperature of +23 degrees °C at 50% relative humidity. It does not necessarily reflect the conditions of industrial use and it does not guarantee the product to be suitable for certain applications. The client remains liable for the proper selection and correct use of the CHIORINO product. CHIORINO cannot be held responsible should damages arise from the use of its products. Necessary alterations to this data can be made without prior notice.