

SG7-H

STRUCTURE

External covering

Material Synthetic elastomer

Surface pattern Medium sandblast


Special execution ---

Colour Amber

Hardness 65 ±5 Sh.A

Textile carcass

Material Polyester (PET)

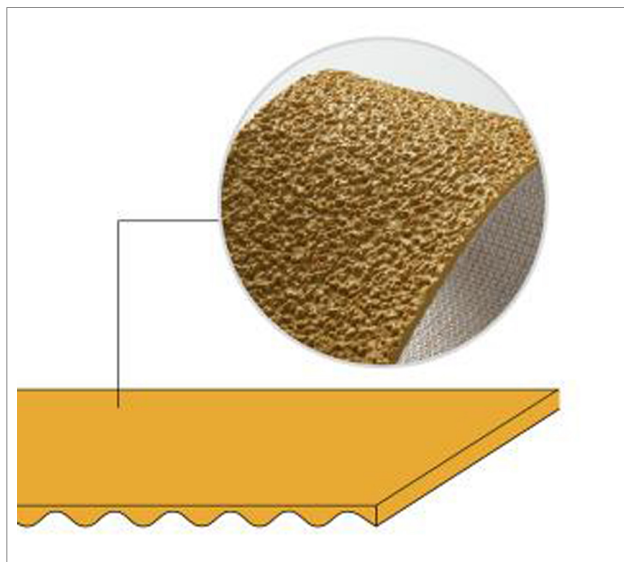

TECHNICAL SPECIFICATIONS

Total thickness		2.0 mm	0.08 in.
Weight		2.2 kg/m ²	0.45 lbs./sq.ft
Tensile strength		60 N/mm	343 lbs./in.
Temperature resistance (1)	min	-10 °C	14 °F
	max	120 °C	248 °F

(1) Use of the roller covering with limit values may reduce its life

ROLL SIZES

Length	115 m	4528 in.
Width (2)	50 mm	2 in.
	70 mm	3 in.

(2) Other widths upon request

SUITABLE FOR

Textile: weaving
Industrial laundries

ADHESIVES

- To glue the covering to the roller it is recommendable to use the single-component adhesive TEXCOL CHIORINO

FEATURES

- Good adhesion
- Resistance to oils

COMPLIANCES

REACH Regulation EC 1907/2006 and amendments

NOTES

Self-adhesive/A version available
H = high performance

DISCLAIMER

The information contained in this document describes the features of the Chiorino product as tested in a laboratory environment at a temperature of +23 degrees °C at 50% relative humidity. It does not necessarily reflect the conditions of industrial use and it does not guarantee the product to be suitable for certain applications. The client remains liable for the proper selection and correct use of the Chiorino product. Chiorino cannot be held responsible should damages arise from the use of its products. Necessary alterations to this data can be made without prior notice.